

JS11S系列时间继电器



JS11S



JS11S-1




JS11S-2

1 适用范围

JS11S系列时间继电器适用于交流50Hz，额定控制电源电压至380V或直流24V的控制电路中作延时元件，按预定的时间接通或分断电路。

2 型号及含义

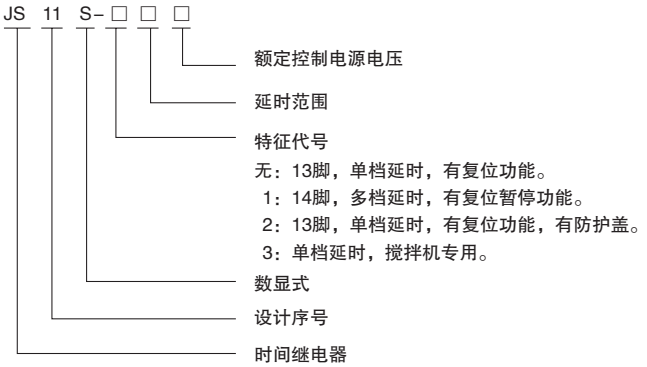


3 主要参数及技术性能

工作方式	通电延时
触点数量	延时2转换 瞬时1转换
触点容量	5 A 220VAC(阻性) Ue/Ie: AC-15 220V/0.5A; DC-13 24V/0.5A; Ith: 5A
电源电压	AC50Hz 36V、110V、127V、220V、380V、DC24V（其它电压可定制）
电寿命	1×10 ⁵ 次
机械寿命	1×10 ⁶ 次
延时精度	≤1%
环境温度	－5℃～＋40℃
安装方式	面板式

型号	延时范围
JS11S JS11S-2	0.1s~9.9s, 1s~99s, 0.1min~9.9min, 1min~99min, 0.1h~9.9h, 1h~99h, 0.01s~9.99s, 0.1s~99.9s, 1s~999s, 1s~9min59s, 0.1min~99.9min, 1min~999min, 1min~9h59min, 0.1h~99.9h, 1h~999h, 0.01s~99.99s, 0.1s~999.9s, 1s~9999s, 0.1min~999.9min, 1min~99h59min, 1s~99min59s, 1min~9999min, 0.1h~999.9h, 1h~9999h
JS11S-1	0.01s~99.99s、1s~99min99s、1min~99h99min
JS11S-3	0.1s~99.9s、1s~999s

JS11S系列时间继电器

4 接线图

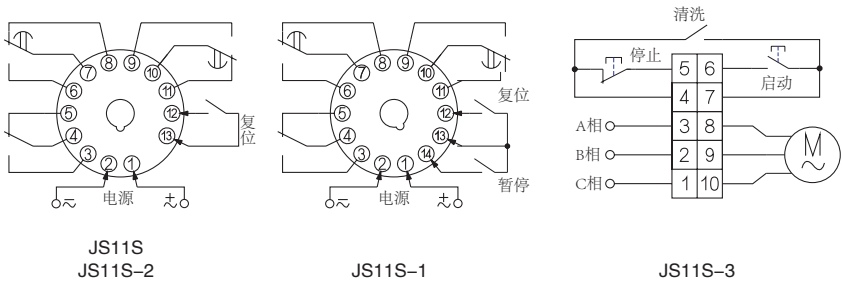

5 外形及安装尺寸

