


BH-0.66 III
型电流互感器

1 适用范围

BH-0.66III型电流互感器主要用于户内，供额定电压为0.66kV及以下，额定频率为50Hz的交流电路中作为电流、电能测量或继电保护用。产品为塑壳式电流互感器，广泛应用于成套柜体，其安装方法可采用母排固定和底板固定安装方法，适合任意方向安装，与I、II型相比具有容量大、精度高、附件少、安装方便等优点。

符合标准：GB 1208。



2 型号及含义



3 正常工作条件和安装条件





- 3.1 安装场所：户内。
- 3.2 环境温度：-5℃ ~ 40℃。
- 3.3 环境湿度：相对湿度不大于80%。
- 3.4 海拔高度：不超过1000m。
- 3.5 大气条件：大气中无严重污秽。

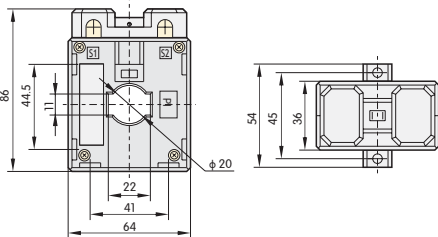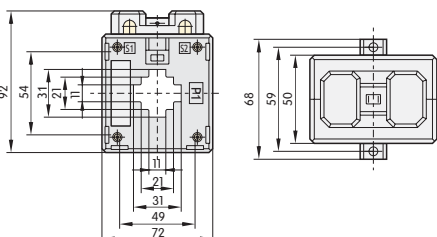4 主要技术参数及外形安装尺寸

	电流比A	额定输出VA				穿心匝数	外形及安装尺寸
		1级	0.5级	0.5S级	0.2级		
	75/5	2.5				1	
	100/5	5				1	
	150/5	10	5			1	
	200/5	10	5			1	
	75/1	2.5	1			1	
	100/1	2.5	1			1	
	150/1	10	5			1	
	150/5	10	5	5	5	1	
	200/5	10	5	5	5	1	
	250/5	10	5	5	5	1	
	300/5	10	5	5	5	1	
	400/5	10	5	5	5	1	
	500/5	10	10	10	10	1	
	150/1	10	5			1	
	200/1	10	5			1	
	250/1	10	5			1	
	300/1	10	5			1	
	400/1	10	5			1	



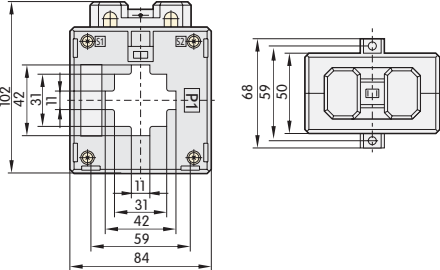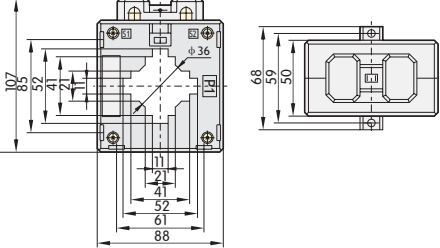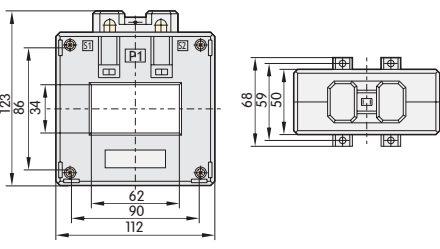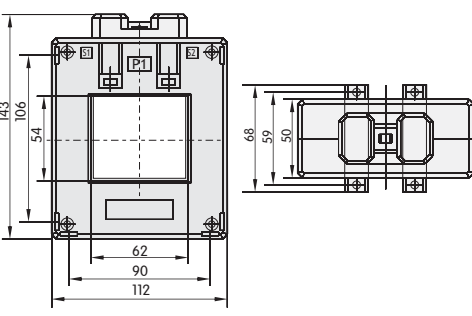配电电器

	电流比A	额定输出VA				穿心匝数	外形及安装尺寸
		I级	0.5级	0.5S级	0.2级		
	150/5	10	5			1	
	200/5	10	5			1	
	250/5	10	5			1	
	300/5	10	10	5	5	1	
	400/5	10	10	5	5	1	
	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	150/1	10	5			1	
	200/1	10	5			1	
	250/1	10	5			1	
	300/1	10	5			1	
	400/1	10	5			1	
	500/1	10	10			1	
BH-0.66 40 III	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	300/5	10	10			1	
	400/5	10	10			1	
	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	20	20	20	20	1	
	300/1	10	5			1	
	400/1	10	5			1	
	500/1	10	10			1	
	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	1000/1	10	10			1	
BH-0.66 50 III	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	20	20	20	20	1	
	1500/5	20	20	20	20	1	
	500/1	10	10			1	
	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	1000/1	10	10			1	
	1200/1	20	20			1	
	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	20	20	20	20	1	
	1500/5	20	20	20	20	1	
	500/1	10	10			1	
	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	1000/1	10	10			1	
	1200/1	20	20			1	
BH-0.66 60 III	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	20	20	20	20	1	
	1500/5	20	20	20	20	1	
	2000/5	40	40	40	40	1	
	500/1	10	10			1	
	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	1000/1	10	10			1	
	1200/1	20	20			1	
	1500/1	20	20			1	
BH-0.66 60 III × 50	500/5	10	10	10	10	1	
	600/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	20	20	20	20	1	
	1500/5	20	20	20	20	1	
	2000/5	40	40	40	40	1	
	500/1	10	10			1	
	600/1	10	10			1	
	750/1	10	10			1	
	800/1	10	10			1	
	1000/1	10	10			1	
	1200/1	20	20			1	
	1500/1	20	20			1	


配电电器

A




BH-0.66 80 III

电流比A	额定输出VA				穿心匝数
	1级	0.5级	0.5S级	0.2级	
500/5	10	10	10	10	1
600/5	10	10	10	10	1
750/5	10	10	10	10	1
800/5	10	10	10	10	1
1000/5	10	10	10	10	1
1200/5	20	20	20	20	1
1500/5	20	20	20	20	1
2000/5	40	40	40	40	1
2500/5	40	40	40	40	1
500/1	10	10			1
600/1	10	10			1
750/1	10	10			1
800/1	10	10			1
1000/1	10	10			1
1200/1	20	20			1
1500/1	20	20			1
2000/1	40	40			1

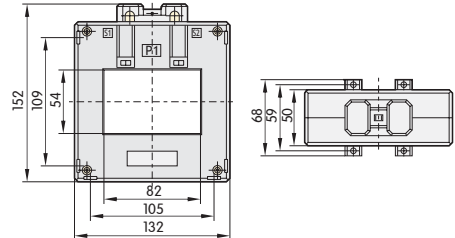


BH-0.66 100 III

800/5	10	10	10	10	1
1000/5	10	10	10	10	1
1200/5	20	20	20	20	1
1500/5	20	20	20	20	1
2000/5	40	40	40	40	1
2500/5	40	40	40	40	1
800/1	10	10			1
1000/1	10	10			1
1200/1	20	20			1
1500/1	20	20			1
2000/1	40	40			1

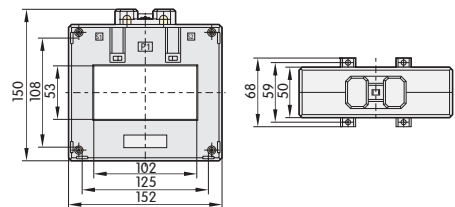


BH-0.66 120 III

1000/5	10	10	10	10	1
1200/5	20	20	20	20	1
1500/5	20	20	20	20	1
2000/5	40	40	40	40	1
2500/5	40	40	40	40	1
3000/5	40	40	40	40	1
4000/5	40	40	40	40	1
1000/1	10	10			1
1200/1	20	20			1
1500/1	20	20			1
2000/1	40	40			1
2500/1	40	40			1
3000/1	40	40			1

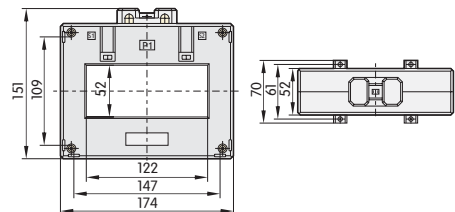

5 安装附件

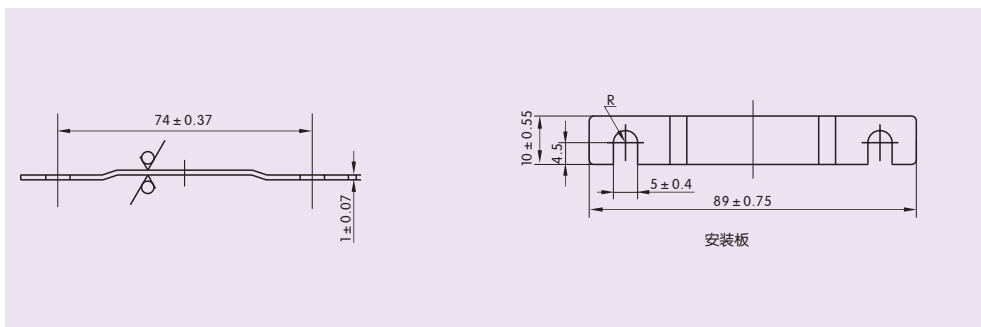

6 订货须知

用户在订货时，需提供以下信息：

6.1 产品型号及窗口宽度；

6.2 额定电流比；

6.3 额定输出及相应准确级；

例如：订货BH-0.66 III 型，窗口宽度为30mm，额定电流比200/5A、额定输出5VA、准确级0.5级的互感器。

订货代号为：BH-0.66 30III 200/5A 5VA 0.5级。

6.4 如有特殊要求时，可与厂家协商定制。